

Building of fiber optic networks in an urban environment FTTx



SIDECUT SC4P

**A performant
microtrencher for
the deployment
of fiber optic
networks in urban
environment**

Process

- Axially driven cutting wheel
- Microtrench for fiber optic network

Specific features

- Limited size of the vehicle, which allows cutting in sidewalks
- Dry microtrenching
- Sound proofing of the components
- No blasting and no dust during the burying works
- Quick network deployment process

Innovation

- Fully remote controlled
- Radio with LCD display showing working parameters (remotely available via Re.M portal):
 - Trenching hours (total/partial)
 - Trenching distance (total/partial)
 - Trenching depth
 - Machine operating parameters (pressure & temperature)
 - Faults/anomalies

Assets

- Clean microtrenches and job site
- Speed of execution
- No disturbance to pedestrians during the works
- Limited disturbance to residents
- Increased safety of the jobsite
- No damage to road foundations
- Sidewalks can be quickly used again after works
- Building costs reduction
- Trenching in curves

Output

- Between 40 and 120 m/hour



Features of the cutting tool

- Axially driven cutting wheel

Type of wheel	Cutting width (mm)	Trench depth (mm)
R350	35 to 70	up to 350

- Cutting tool mounted on 5-axis boom
- Slope correction of the tool $\pm 15^\circ$

Sizes and weight

- Length in working position: 4.55 m
- Width: 1.05 m
- Height: 1.93 m
- Weight: ca. 3 tons

Carrier


- Engine: KOHLER KDI 2504 TCR - 55,4 kW (74.5 Hp)
- Tier 4f stage V diesel engine - 2000 rpm
- Hydrostatic translation
- Articulated carrier with 4 wheel drive

Accessories

- Remote control



Technical diagram

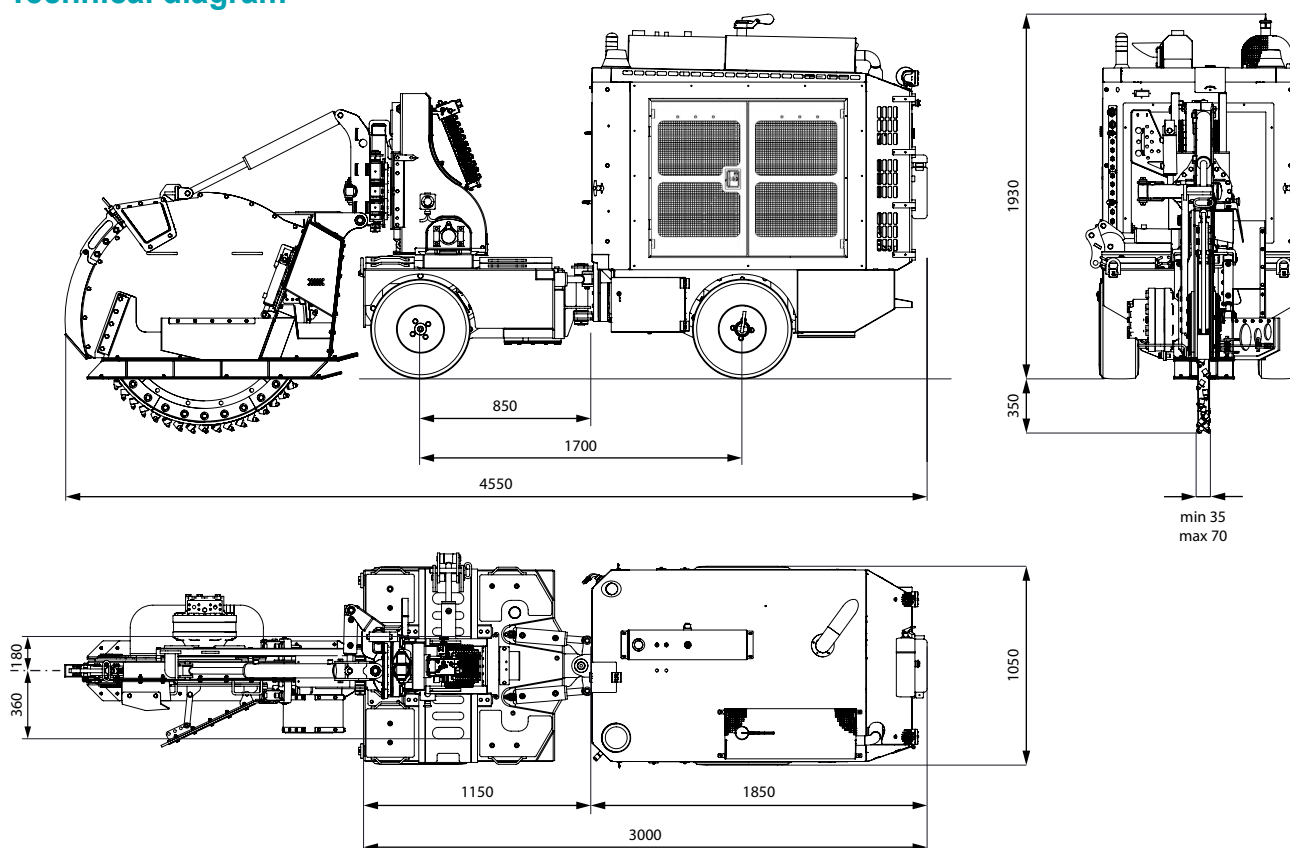

Non-contractual pictures SC4P_03/19_EN - Specifications as shown are not binding to the manufacturer and may be changed without prior notice. The equipment offered in this leaflet can include optional fittings and devices.